


## 1. To fit the Hitch Lock.

Hold the head of the lock bar, insert the key and turn it a quarter turn anti-clockwise, remove the bolt.

2.

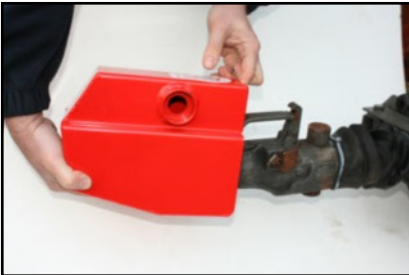

Ensure that the handle on the hitch is fully down, pass the cover over the hitch until the lock opening is positioned beyond the handle.

3.



With the key inserted in the lock bolt and in the unlocked position, push the lock bolt through the cover assembly. Hold the head of The lock bolt, turn the key a quarter turn clockwise and remove keys.

4.



The BR30 fitted.

### **Bulldog Security Products**

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.

Tel: 01952 728171 Fax: 01952 728117

Email [sales@bulldogsecure.com](mailto:sales@bulldogsecure.com) [www.bulldogsecure.com](http://www.bulldogsecure.com)

### **Lock Lubrication.**

**IMPORTANT** - To ensure free movement of the lock, spray lock mechanism & ball bearings with WD40 (or equivalent) minimum every four months.